

700915/USW
Brushed Nickel

 700910/USW
Chrome

 700916/USW
Matte Black

 700912/USW
Matte Graphite

 700917/USW
Matte Black/
Rose Gold

 700918/USW
Matte Black/
Brushed Gold


Atik

Semi-Pro Pull-Down Faucet

Specifications

Flexible soft-touch hose

Practical cold-start function for energy saving

Pull-down spout with 2 sprays

Easy assembly due to central fixing nut


Flexible metal connection hoses approx. 39.37"

Connection type: High pressure

Swivel range: 360°

Flow Rate: 1.75 gpm

Hole count: 1 to 3 (base plate available separately)

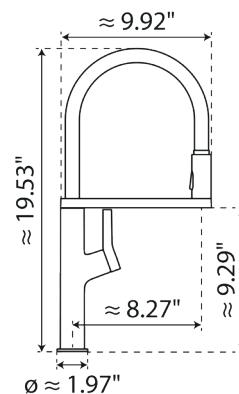

Codes & Standards

- California Energy Commission (CEC)
- Department of Energy (DOE)
- ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN 61
- ADA Compliance
- NSF/ANSI 372
- MASS