

700555/USW
Brushed Nickel



700550/USW
Chrome



700556/USW
Matte Black



700557/USW
Matte Black/
Rose Gold



700558/USW
Matte Black/
Brushed Gold



Felis

Semi-Pro Pull-Down Faucet

Specifications

Practical cold-start function for energy saving

Adjustable scalding protection

Pull-down spout with 2 sprays

Easy assembly due to central fixing nut


Flexible metal connection hoses approx. 39.37"

Connection type: High pressure

Swivel range: 360°

Flow Rate: 1.75 gpm

Hole count: 1 to 3 (base plate available separately)

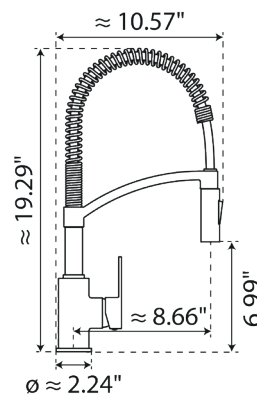

Codes & Standards

- California Energy Commission (CEC)
- Department of Energy (DOE)
- ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN 61
- ADA Compliance
- NSF/ANSI 372
- MASS